


JDS-Series Dimensions



Dimensions (mm)											
Type	A	A1	A2	A3	B	B1	B2	H	H1	H2	H3
JDS-05	228	73	155	NA	150	69	81	412	297	117	138
JDS-10	228	73	155	NA	150	69	81	487	345	117	138
* JDS-10	312	82	183	101	163	76	87	494	351	124	156
JDS-20	390	103	235	151	210	105	105	532	400	150	152
JDS-30S(T)	390	103	235	151	210	105	105	S:572;T:552	S:440;T:420	150	152
JDS-50E	440	105	240	150	180	85	95	622	450	155	227
JDS-50	470	110	257	170	218	98	120	633	468	160	3":239;4":234
JDS-75	470	110	257	170	218	98	120	673	508	160	3":239;4":234

- » Note1 : S: Single Phase ; T: Three Phase
- » Note2 : Automatic models are available in single-phase versions(0.5~2HP) and in three-phase versions(0.5~2HP).
- » Note3 : Q.D.C. (Quick Discharge Connection) is applied to all models.
- » Note4 : *JDS-10 is Elbow Type.
- » Note5 : JDS-50E is economical type which with smaller size motor frame to make it as 5HP.

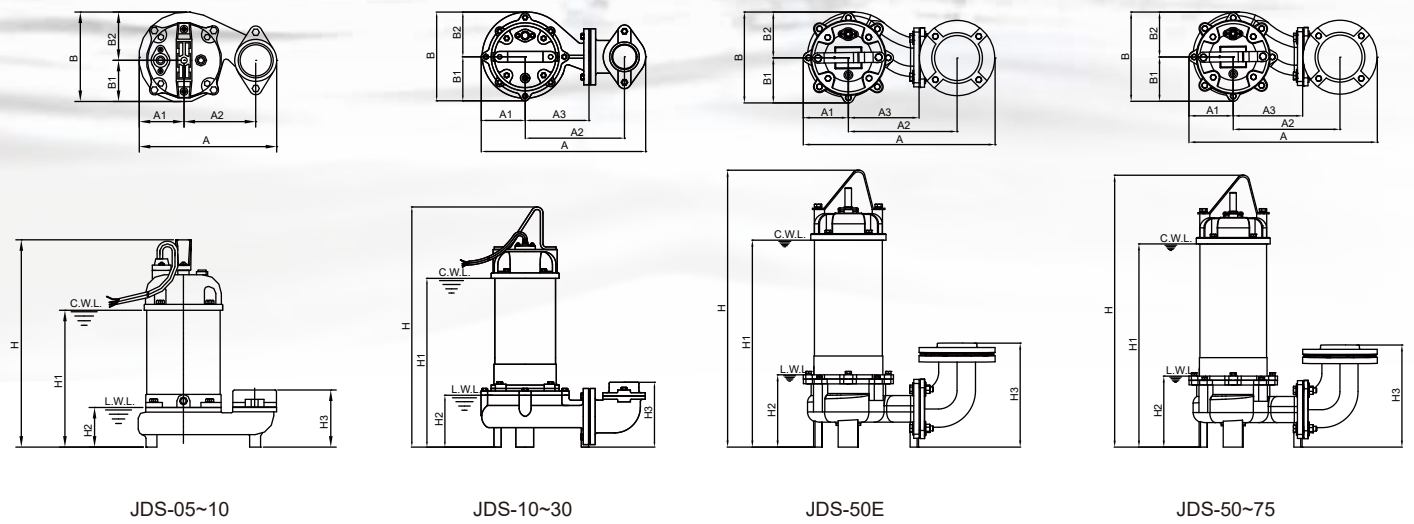

APEC PUMP ENTERPRISE CORP.



3F.,No.394,Sec.2 Mingzhi Rd.,Taishan Dist.,New Taipei City 243,Taiwan.
TEL: +886-2-29034567 Fax: +886-2-29064567



JDS
SERIES 60HZ
Submersible Vortex Sewage Pump



www.apecpump.com

Vol.1PJDS-2-1031K

